

WISCONSIN

**37.0 HP GASOLINE
DUAL FUEL, LPG &
NG OPTIONS**

VG4D

YOUR HEAVY-DUTY SOURCE OF POWER

Setting industry Standards since 1909, Wisconsin continues to offer you a wide selection of air-cooled gasoline engines. Five models allow you to choose from twin-cylinder and four-cylinder engines with power ranging from 18.0 to 65.9 HP.

WISCONSIN CONSTRUCTION

Wisconsin Engines are designed for those tough applications that require durability and long life reliability. The multi-cylinder, v-block design offers unique side load capability for a wide variety of industrial applications.



STANDARD FEATURES

- 4-Cylinder
- Air-Cooled
- V-Block Configuration
- Forged-Steel Crankshaft with Tapered Roller Main Bearings
- Heavy-Duty Cast-Iron Block
- Forged-Steel Connecting Rods
- Cast Iron Cylinders
- Centrifugal Flyweight Governor
- Full-Flow Oil Filter
- Aluminum Alloy Pistons
- Electric Starter with 30 amp Flywheel Alternator
- Heat Resistant Alloy Steel Exhaust Valves
- Instrument Panel
- Replaceable Valve Seat Inserts
- Solid State Ignition
- Exhaust Valve Rotators

WORLDWIDE PARTS & SERVICE

We back our engines with a worldwide service network. Experienced Wisconsin representatives are always ready to meet your needs.




WISCONSIN MOTORS, LLC

WISCONSIN

37.0 HP GASOLINE DUAL FUEL, LPG & NG OPTIONS

VG4D

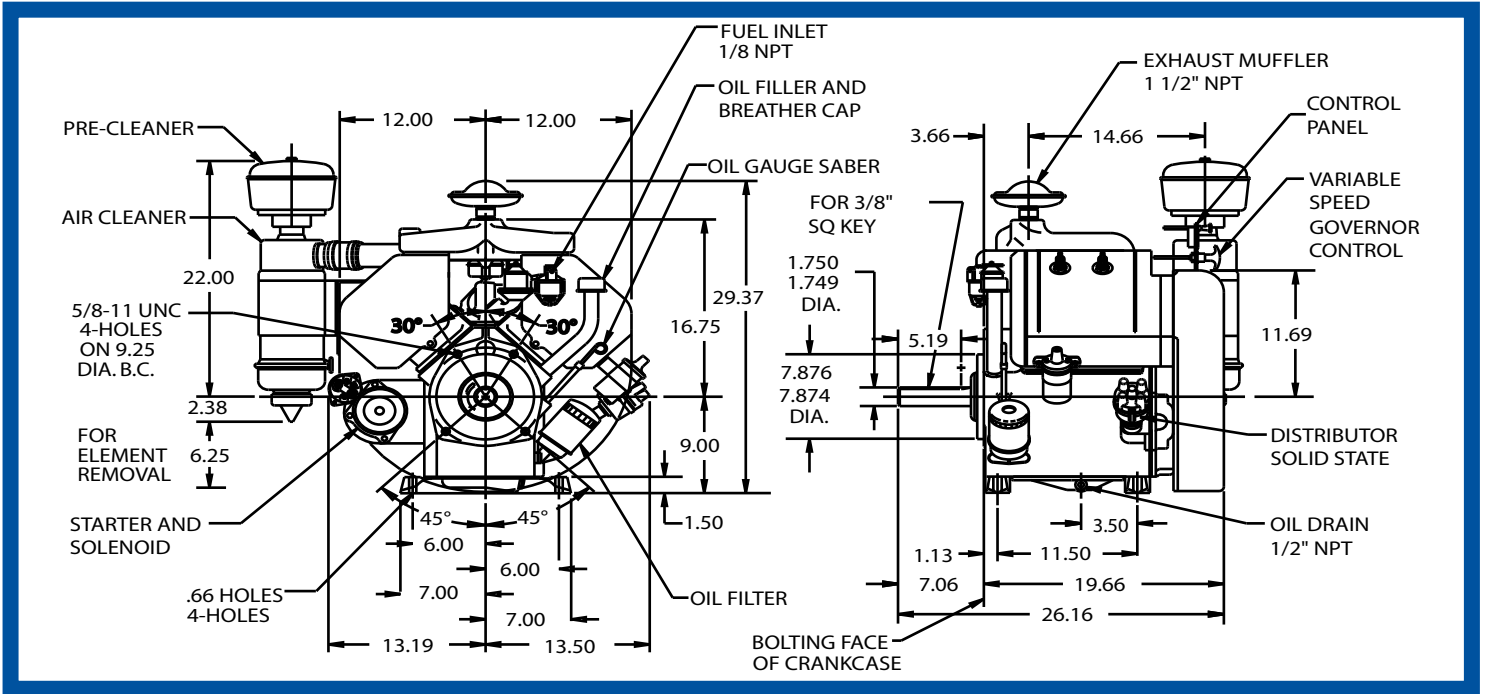

* Net Weight Dry Standard Engine 410 lbs. (186.4 kg)

Bore 3.50 in. (88.9 mm)
Stroke 4.0 in. (101.4 mm)
Displacement 154 cu. in. (2524 cc)

| RPM | HP | KW | TORQUE | |
|------|----|------|---------|------|
| | | | Ft. lbs | Kg-m |
| 1400 | 25 | 18.7 | 93.8 | 13.0 |
| 1600 | 29 | 21.7 | 95.2 | 13.2 |
| 1800 | 32 | 23.9 | 93.4 | 12.9 |
| 2000 | 34 | 25.3 | 89.2 | 12.3 |
| 2200 | 36 | 26.9 | 85.9 | 11.9 |
| 2400 | 37 | 26.9 | 81.0 | 11.2 |

POWER OUTPUT

Maximum dynamometer net brake horsepower of the basic engine corrected to a pressure reading of 29.31 in. Hg (99 KPA) dry barometer and temperature of 77° F (25° C) when tested in accordance with SAE Test Code J1349. Engine output can be demonstrated within 5% at the factory under standard rating conditions. Power will decrease 3.5% for each 1000 ft. (305 M) above 500 ft. and 1% for each 10° F above standard temperature of 77° F (25° C). For continuous operation, applications should be limited to 80% of power shown.

OPTIONS FOR EVERY NEED

- Dry Element and Tri-Phase Air Cleaners
- Bell Housings (SAE #4&5)
- Clutch Take-Off
- Clutch Reduction Assemblies (In Ratios of 2,3, or 4 to 1 with Clockwise or Counter-Clockwise Take-Off Shaft Rotation)
- Heavy-Duty Mufflers
- High-Temperature & Low Oil Safety Switches
- Accessory Drive for Hydraulic Pump
- Special Crankshaft Extensions & Stub Shafts
- 37 amp Belt-Driven Alternator

* Contact your Wisconsin Representative for Additional Options



INDUSTRIAL ENGINES INC